S2B80 Series
Cyla 10

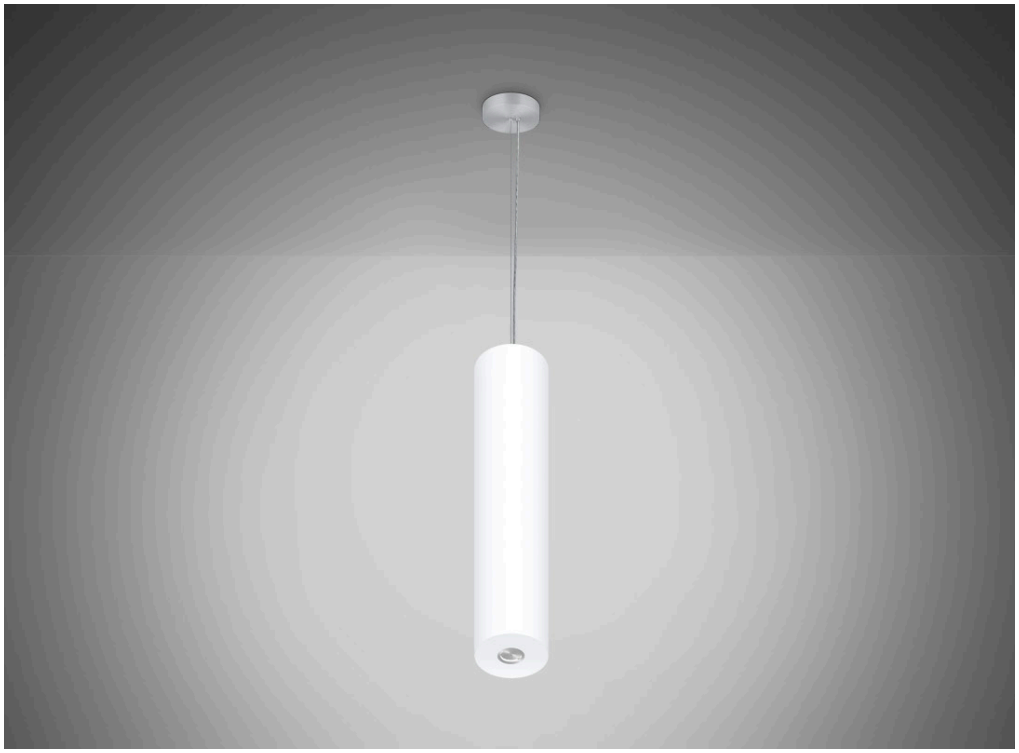

DIMENSIONS



W	H	X	BASE MODEL NO.
10″	96″	48″	**S2B83-L48**
10″	120″	72″	**S2B85-L72**
10″	120″	96″	**S2B86-L96**

SPECIFICATIONS

Drivers: 0-10V dimming to 1%, 120/277 for both Cylinder and Downlight (on separate circuits)
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

FEATURES

- Opal Matte Acrylic Cylinder
- Clear Silver Braided Cord with (1) Adjustable Aircraft Cable
- Downlight and Cylinder Core May Be Wired to Separate Control Circuits
- Drivers Mounted in Canopy
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Downlight + Lamp Code + Finish + OA + Option Code

Model No.	+ Downlight	+ Lamp Code	+ Finish	+ OA	+ Option
S2B83-L48	____*	27K	PT	OA	Option
S2B85-L72	D18N	30K	XT		
S2B86-L96	D18M	35K	CC		
	D18W	40K			

____* = if left blank – no downlight

FINISHES

PT Powder Coated Finishes*
XT Trending Brushed Metal Finishes*
CC Custom Painted Finish
*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

DOWNLIGHT OPTIONS

D18N Narrow (30 degrees)
D18M Medium (45 degrees)
D18W Wide (60 degrees)

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup
OA Specify Overall Height of Fixture in Inches; E.G. – OA48
1S Single Stem
BK1 Black Cord with (1) Adjustable Aircraft Cables
WH1 White Cord with (1) Adjustable Aircraft Cables

LUMENS

Cylinder Core Lighting Lumens: LXX = LED Wattage, therefore L24 = LED 24W. The typical lumen output is ~109LPW, so therefore L24 would deliver 2,616L. Use this formula to estimate delivered lumens based on the LXX number for each length.
Downlight Lumens: DxxW indicates Downlight wattage and beam spread. For the downlight, typical lumen output is 100LPW, so a D12W would deliver 1,200L in a wide beam pattern.

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2025 Scott Architectural Lighting. All Rights Reserved. Made in the USA.