




DIMENSIONS

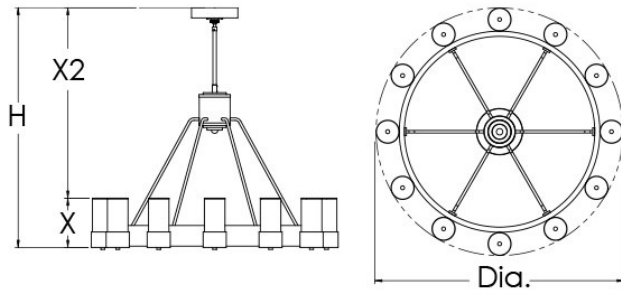

| Dia | X | X2 | H | BASE MODEL NO. |
|-----|--------|---------|-----|----------------|
| 48" | 9 1/2" | 31 1/2" | 72" | S1040-8L08 |
| 48" | 9 1/2" | 31 1/2" | 72" | S1040-12L08 |
| 60" | 9 1/2" | 39 1/2" | 72" | S1041-8L08 |
| 60" | 9 1/2" | 39 1/2" | 72" | S1041-12L08 |

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight)

FEATURES

- Closed Top Opal Matte Acrylic Lens
- LED Uplight ~8W per "Candle"
- LED 0-10V 1% Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

| | | | | |
|-------------|-------|------|------|----------|
| S1040-8L08 | + 27K | + PT | + OA | + Option |
| S1040-12L08 | 30K | XT | | |
| S1041-8L08 | 35K | PF | | |
| S1041-12L08 | 40K | CC | | |

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. – OA96

LIGHT OUTPUT

LXX = ~ 80 LPW Delivered Lumens (Example: 8L08= 8QTY x 8W x 80LPW = 5,120 Lumens)