


# S1045 Series

Carro



## DIMENSIONS

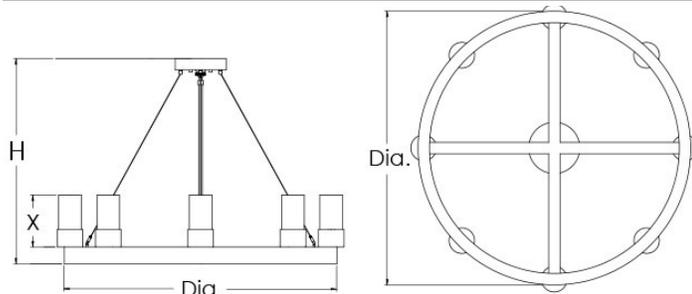

Dia	X	H	BASE MODEL NO.
48"	8"	48"	<b>S1045-8L08</b>
60"	8"	60"	<b>S1046-8L08</b>
60"	8"	60"	<b>S1046-12L08</b>
72"	8"	72"	<b>S1047-8L08</b>
72"	8"	72"	<b>S1047-12L08</b>

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight)

## FEATURES

- Closed Top Opal Matte Acrylic Lens – 4" Dia.
- LED Uplight ~8W per "Candle"
- Clear Silver Braided Cord with (4) Adjustable Aircraft Cable
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Ring Finish + Cup Finish + OA + Option Code						
S1045-8L08	+ 27K	+ PT	+ PT	+ OA	+ Option	
S1046-8L08	30K	XT	XT			
S1046-12L08	35K	PF	PF			
S1047-8L08	40K	CC	CC			
S1047-12L08						

## FINISHES

**PT** Powder Coated Finishes\*

**XT** Trending Brushed Metal Finishes\*

**PF** Pure Metal Finishes\*

**CC** Custom Painted Finish

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

**BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.

**EML** Remote 10W Emergency LED Battery Backup

**OA** Specify Overall Height of Fixture in Inches; E.G. – OA60

**BK4** Black Power Cable

**WH4** White Power Cable

## LIGHT OUTPUT

**LXX** = ~ 80 LPW Delivered Lumens (Example: 8L08= 8QTY x 8W x 80LPW = 5,120 Lumens)