

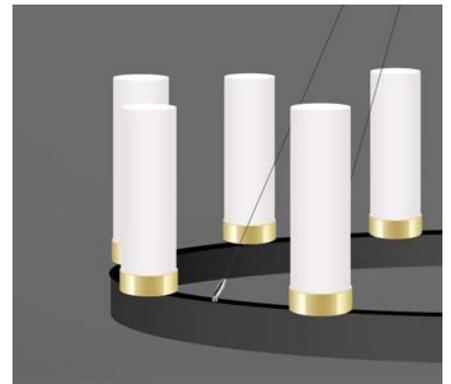


S1050 Series

Giro

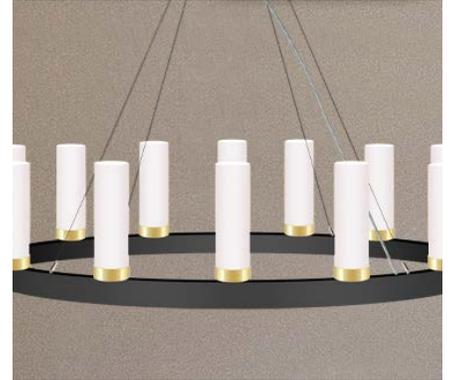

DIMENSIONS

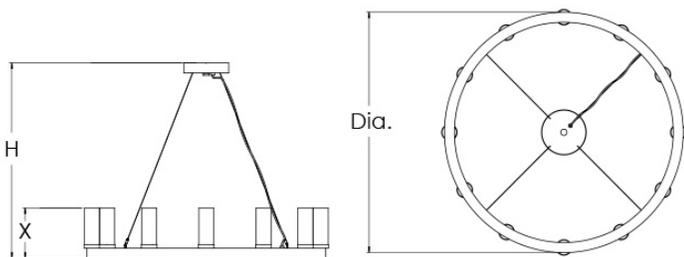

Dia	X	H	BASE MODEL NO.
48"	12"	48"	S1050-8L08
48"	12"	48"	S1050-12L08
60"	12"	60"	S1051-8L08
60"	12"	60"	S1051-12L08
72"	12"	72"	S1052-8L08
72"	12"	72"	S1052-12L08

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight)

FEATURES

- Closed Top Opal Matte Acrylic Lens – 3" Diameter
- LED Uplight ~8W per "candle"
- AC Cable Mounted – Adjustable
- LED 0-10V 1% Dimming Driver in Canopy

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Ring Finish + Cup Finish + OA + Option Code

S1050-8L08	+ 27K	+ PT	+ PT	+ OA	+ Option
S1050-12L08	30K	XT	XT		
S1051-8L08	35K	PF	PF		
S1051-12L08	40K	CC	CC		
S1052-8L08					
S1052-12L08					

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. – OA96

BK4 Black Cord with (4) Adjustable Aircraft Cables

WH4 WH1 White Cord with (4) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 80 LPW Delivered Lumens (Example: 8L08= 8QTY x 8W x 80LPW = 5,120 Lumens)

