


# S1070 Series

Minimo-Trio



## DIMENSIONS

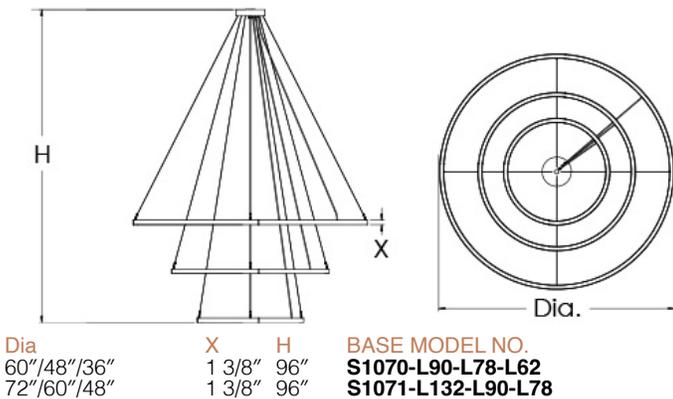

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277 (Drivers are Remote)  
**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight)

## FEATURES

- Silicone Opal Lens
- LED Downlight
- Clear Silver Braided Cord(s) with Adjustable Aircraft Cable(s)
- (3) Remote Driver Boxes above ceiling
- LED 0-10V 1% Dimming Drivers

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code  
 S1070-L90-L78-L62 + 27K + PT + OA + Option  
 S1071-L132-L90-L78 30K XT  
 35K CC  
 40K

## FINISHES

PT Powder Coated Finishes\*  
 XT Trending Brushed Metal Finishes\*  
 CC Custom Painted Finish  
 \*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

EML Remote 10W Emergency LED Battery Backup  
 OA Specify Overall Height of Fixture in Inches; E.G. – OA96  
 BK12 Black Cord with (12) Adjustable Aircraft Cables  
 WH12 White Cord with (12) Adjustable Aircraft Cables

## LIGHT OUTPUT

LXX = ~ 65 LPW Delivered Lumens (Example: L90= 90W x 65LPW = 5,850 Lumens)