


S1075 Series

Corono-Duo



DIMENSIONS

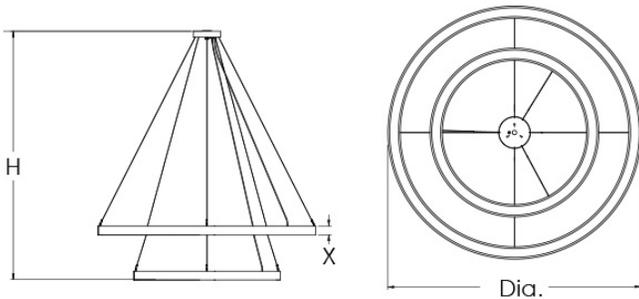

Dia	X	H	BASE MODEL NO.
48"/36"	3 1/2"	96"	S1075-L96-L72
60"/36"	3 1/2"	96"	S1076-L124-L72
60"/48"	3 1/2"	96"	S1076-L124-L96
72"/36"	3 1/2"	96"	S1077-L144-L72
72"/48"	3 1/2"	96"	S1077-L144-L96
72"/60"	3 1/2"	96"	S1077-L144-L124

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277 (Drivers are Remote)
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight).

FEATURES

- Opal XT Acrylic Lens
- LED Light Source
- Clear Silver Braided Cord(s) with Adjustable Aircraft Cable(s)
- LED 0-10V 1% Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish	OA	Option Code
S1075-L96-L72	+ 27K	+ PT + OA + Option
S1076-L124-L72	30K	XT
S1076-L124-L96	35K	CC
S1077-L144-L72	40K	
S1077-L144-L96		
S1077-L144-L124		

FINISHES

- PT Powder Coated Finishes*
- XT Trending Brushed Metal Finishes*
- CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

- BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
- EML Remote 10W Emergency LED Battery Backup
- OA Specify Overall Height of Fixture in Inches; E.G. – OA96
- BK8 Black Cord with (8) Adjustable Aircraft Cables
- WH8 White Cord with (8) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 99 LPW Delivered Lumens (Example: L124= 124W x 99LPW = 12,276 Lumens)