


S1080 Series

Corono-Trio



DIMENSIONS

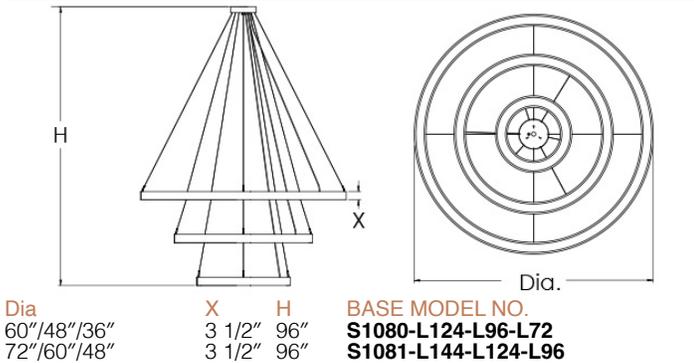

SPECIFICATIONS

Driver: 0-10V dimming to 1% for LED Lamping, 120/277 (Drivers are Remote)

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight).

FEATURES

- Opal XT Acrylic Lens
- LED Downlight
- Clear Silver Braided Cord(s) with Adjustable Aircraft Cable(s)
- LED 0-10V 1% Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish	+ OA	+ Option Code
S1080-L124-L96-L72	+ 27K	+ PT + OA + Option
S1081-L144-L124-L96	30K	XT
	35K	CC
	40K	

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. – OA96

BK12 Black Cord with (12) Adjustable Aircraft Cables

WH12 White Cord with (12) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 99 LPW Delivered Lumens (Example: L124= 124W x 99LPW = 12,276 Lumens)