


S1100 Series

Cono Ring



DIMENSIONS

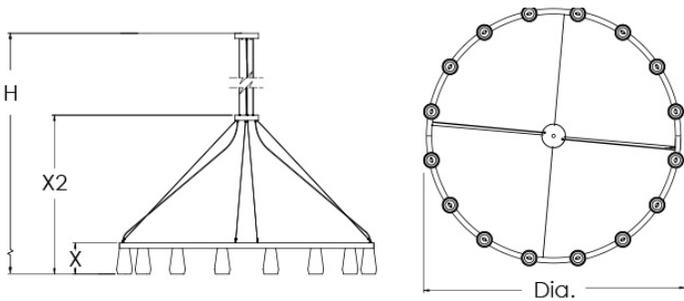

Dia	X	X2	H	BASE MODEL NO.
48"	11 3/4"	30"	48"	S1100-8N20
48"	11 3/4"	30"	48"	S1100-8L08
72"	11 3/4"	45"	72"	S1101-12N20
72"	11 3/4"	45"	72"	S1101-12L08
96"	11 3/4"	60"	96"	S1102-16N20
96"	11 3/4"	60"	96"	S1102-16L08

SPECIFICATIONS

Driver: 0-10V dimming to 1% for LED Lamping, 120V Only (for LED Source)

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight).

FEATURES

- Open Shade
- Clear Silver Braided Cord(s) with (4) Adjustable Aircraft Cable w/ Gathering Ring
- LED or Incandescent Lamping – 120V only Max 22W each
- LED option ~8W per shade/0-10V 1% Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code	Finish	OA	Option Code
S1100-8N20	+ 27K	+ PT	+ OA + Option
S1100-8L08	30K	XT	
S1101-12N20	35K	CC	
S1101-12L08	40K		
S1102-16N20			
S1102-16L08			

(Lamp code [such as 27K, 30K, etc.] is NOT required for N20 options – CCT is by others)

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

OA Specify Overall Height of Fixture in Inches; E.G. – OA60

BK4 Black Cord with (4) Adjustable Aircraft Cables

WH4 White Cord with (4) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 70 LPW (LED Lamping) Delivered Lumens (Example: 8L08= 8QTY x 8W x 70LPW = 4,480 Lumens). Light output for N20 Lamping is based on the chosen lamp (by others).