



# S1120 Series

Juggle-Duo

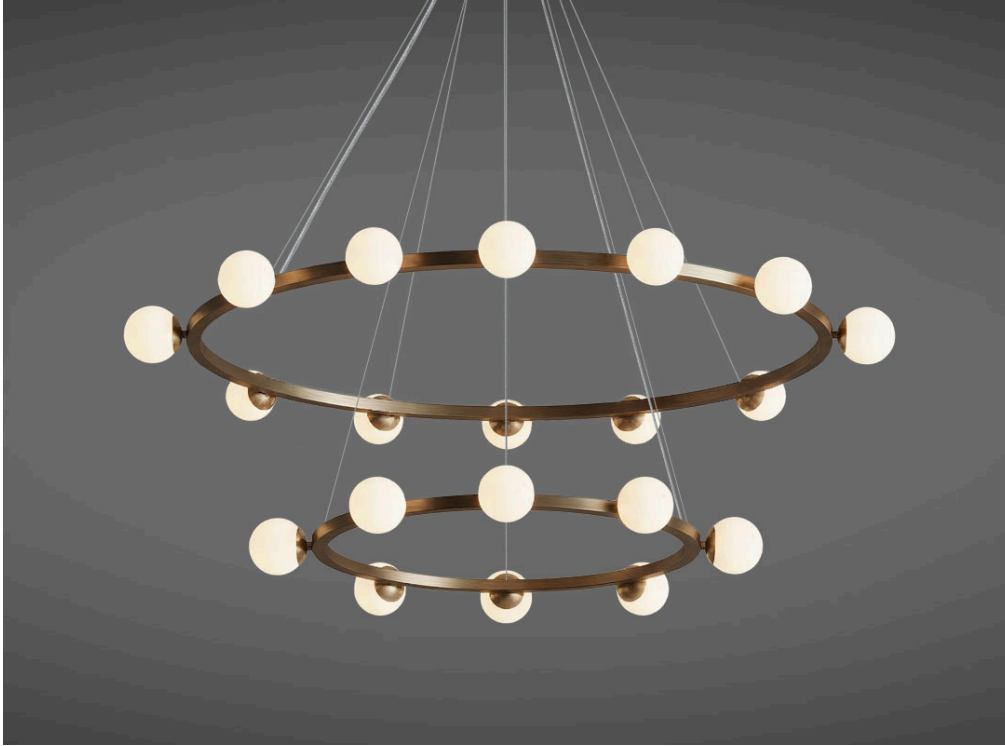

## DIMENSIONS

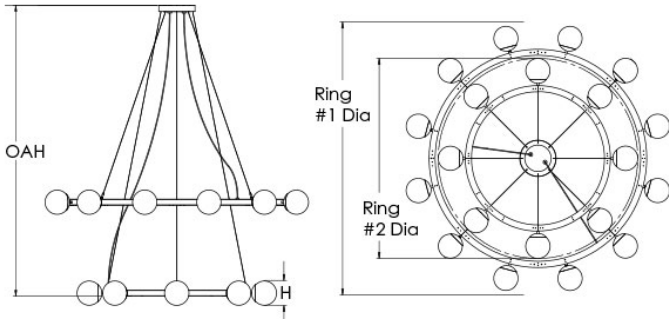

Ring #1 Dia	Ring #2 Dia	H	OAH	BASE MODEL NO.
90" (12 Light)	66" (8 Light)	8"	96"	S1120-20L12
90" (12 Light)	66" (8 Light)	8"	96"	S1120-20N08
90" (12 Light)	66" (12 Light)	8"	96"	S1120-24L12
90" (12 Light)	66" (12 Light)	8"	96"	S1120-24N08

## SPECIFICATIONS

**Voltage:** 120V Only (For alternate voltage options, please contact factory.)

**Dimming:** 0-10V dimming to 1%, 120/277 (Drivers are Remote) (LED ONLY) (For alternate dimming options, please contact factory.)

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided (Additional structural blocking required for weight)

## FEATURES

- (20-24) 8" Dia. Acrylic Globes
- Clear Silver Braided Cord with (8) Adjustable Aircraft Cable(s)
- N08 Models have E26 Sockets for 8 Watt LED Lamps by Others
- LED 0-10V 1% Dimming Drivers

## ORDER AS A COMPLETE UNIT:

Model No. + CCT + Finish Code + OA + Option Code					
S1120-20L12	+ 27K	+ PT	+ OA	+ Option	
S1120-20N08	30K	XT			
S1120-24L12	35K	CC			
S1120-24N08	40K				

## FINISHES

**PT** Powder Coated Finishes\*

**XT** Trending Brushed Metal Finishes\*

**CC** Custom Painted Finish

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

**EML** Remote 10W Emergency LED Battery Backup (LED Model Only)

**OA** Specify Overall Height of Fixture in Inches; E.G. – OA96

**BK8** Black Cord with (8) Adjustable Aircraft Cables

**WH8** White Cord with (8) Adjustable Aircraft Cables

## LIGHT OUTPUT

**LXX** = ~90 LPW Delivered Lumens (Example: 20L16= 20 x 16 x 90 = 28,800 Lumens)

N08 = 8W Medium Base Socket