




DIMENSIONS

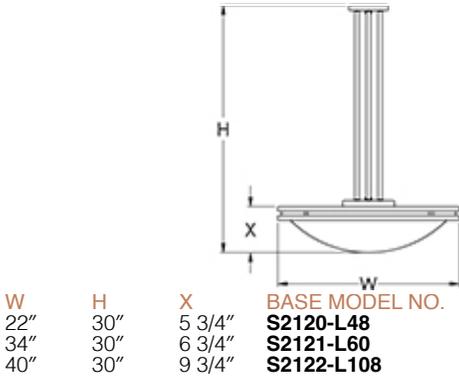

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic Bowl
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code + OA + Option Code
 S2120-L48 + 27K + PT + OA + Option
 S2121-L60 + 30K + XT + OA + Option
 S2122-L108 + 35K + PE + OA + Option
 + 40K + OA + Option

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PE Pure Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

OA Specify Overall Height of Fixture in Inches; e.g. – OA48

FAA Faux Alabaster Acrylic (Hand Painted) [FA1 White; FA2 Antique; FA3 Grey; FA4 Taupe; FA5 Honey; FA6 Tuscan]

SWC 35-Degree Swivel Canopy (Single Stem Only)

1S4AC Single Stem with (4) Aircraft Cables (Formerly S2115 Series)

1S Single Stem, No Cables

2C Two-Circuit Wiring

SB3 Clear Silver Braided Cord with (3) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 88 LPW Delivered Lumens (Example: L48= 48W x 88LPW = 4,224 Lumens)