




## DIMENSIONS

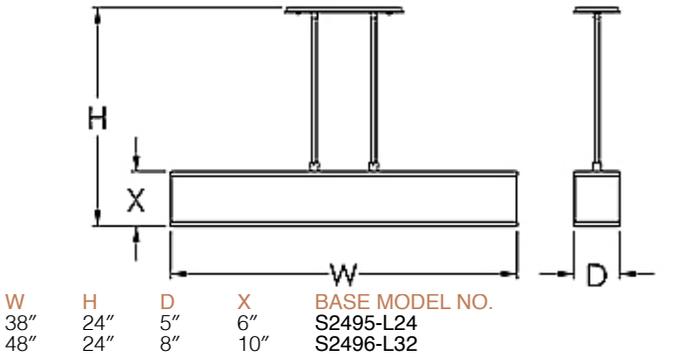

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

## FEATURES

- Opal Matte Acrylic Bottom Diffuser
- Fabric Shades on Heavy Translucent White Styrene
- Two Stems
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code + Fabric Code + OA + Option Code

S2495-L24	+ 27K	+ <u>PT</u>	+ LF01	LF08	+ OA	+ Option
S2496-L32	30K	<u>XT</u>	LF02	LF09		
	35K	<u>PF</u>	LF03	LF10		
	40K		LF04	LF11		
			LF05	LF12		
			LF06	LF13		
			LF07	LF14		

## FINISHES

**PT** Powder Coated Finishes\*

**XT** Trending Brushed Metal Finishes\*

**PF** Pure Metal Finishes\*

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## FABRIC

**LF01** Huggy White

**LF03** Sage

**LF05** Praline

**LF08** Butter

**LF10** Ebony

**LF12** Flan

**LF14** Merlot

CLF Custom Linen Fabric Shade (Consult Factory)

**LF02** Olive

**LF04** Orchre

**LF07** Canvas

**LF09** Breeze

**LF11** Parchment

**LF13** Natural HF

## OPTIONS

**BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.

**EML** Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

**SB2** Clear Silver Braided Cord with (2) Adjustable Aircraft Cables

## LIGHT OUTPUT – (VARIES WITH SHADE COLOR)

**LXX** = ~ 60 LPW Delivered Lumens (Example: L24= 24W x 60LPW = 1,440 Lumens)[White Shade – LF01]