S2566 Series

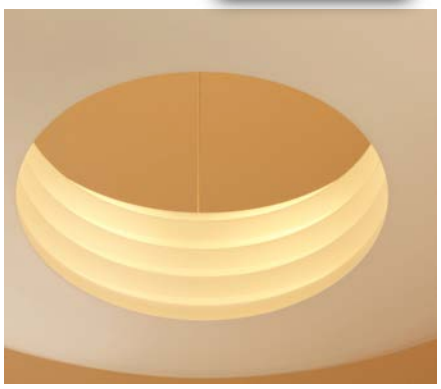

DIMENSIONS



W	H	X	BASE MODEL NO.
36″	24″	6.5″	**S2566-L64**

FEATURES

Drivers: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

FEATURES

- Illuminated Acrylic Baffle Rings
- White SJ Cord with (4) Aircraft Cables
- Cold Rolled Steel
- LED 0-10V Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

S2566-L64	+	27K 30K 35K 40K	+	PT	+	Option

FINISHES

PT Powder Coated Finishes*
*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup
OA Specify Overall Height of Fixture in Inches; e.g. – OA48

LIGHT OUTPUT

LXX = ~ 60 LPW Cylinder (Example: L64= 64W x 60LPW = 3,840 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2025 Scott Architectural Lighting. All Rights Reserved. Made in the USA.