


S2665 Series

Eclipso 3



DIMENSIONS

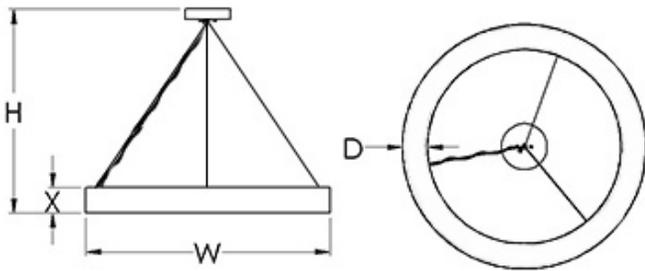

W	H	D	X	BASE MODEL NO.
2'	96"	3.5"	3.5"	S2665-L42
3'	96"	3.5"	3.5"	S2666-L72
4'	96"	3.5"	3.5"	S2667-L96
5'	96"	3.5"	3.5"	S2668-L124

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Glossy Opal Acrylic Lens on (3) Sides
- Solid Aluminum Material
- Canopy Mounted Drivers
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ OA	+ Option Code
S2665-L42	+ 27K	+ PT	+ OA	+ Option	
S2666-L72	+ 30K	+ XT			
S2667-L96	+ 35K	+ CC			
S2668-L124	+ 40K				

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

MCR 4 Straight AC Cables with minimal canopies and remote drivers.

LIGHT OUTPUT

LXX = ~ 113 LPW Delivered Lumens (Example: L72= 72W x 113LPW = 8,136 Lumens)