



S2685 Series

Soto-Q

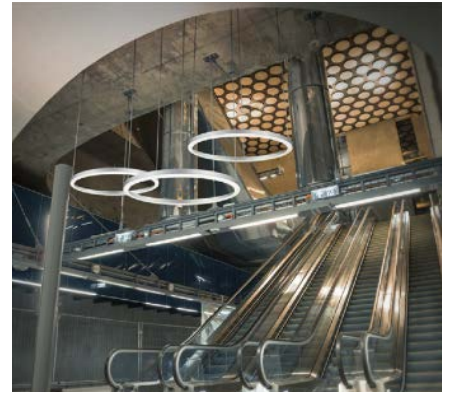

DIMENSIONS

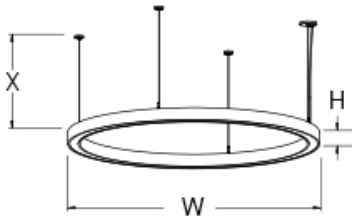

W	H	D	X	BASE MODEL NO.
8'	3.5"	3.5"	96"	S2685-Q-L196
10'	3.5"	3.5"	96"	S2686-Q-L216
12'	3.5"	3.5"	96"	S2687-Q-L260
15'	3.5"	3.5"	96"	S2688-S-L324

Q – Indicates quartered
S – Indicates Sectioned, Not Quartered

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Acrylic Bottom Lens
- Easy Assembly
- Clear Silver Braided Cord with Adjustable Aircraft Cables (8)
- Adjustable to 96" OA
- Quartered Fixtures Help Reduce Shipping Costs
- Solid Aluminum Materials
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

S2685-Q-L196	+	27K	+	PT	ZT	+	OA	+	Option
S2686-Q-L216		30K		CC	CT				
S2687-Q-L260		35K		BA	TT				
S2688-S-L324		40K		NT	PWT				
				GT	BST				

FINISHES

BA Brushed Aluminum	TT Toffee Touch
ZT Bronze Touch	PWT Pewter Touch
NT Nickel Touch	BST Blackend Steel Touch
GT Gold Touch	CC Custom Painted Finish
CT Copper Touch	PT Powder Coated Finishes*

*(Specify Color Code from the list of Powder Coating Finishes)

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 63 LPW Delivered Lumens (Example: L144= 144W x 63LPW = 9,072 Lumens)



Spring Clip Joiner



Quarters Joined