


S2710 Series

Halo



DIMENSIONS

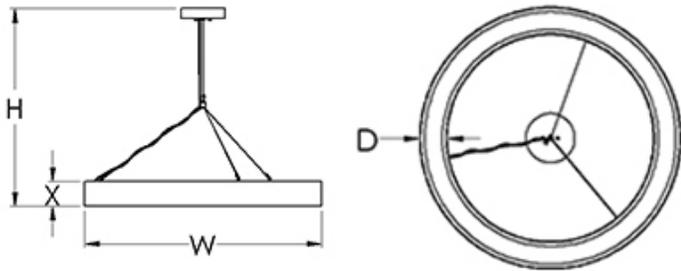

W	H	D	X	BASE MODEL NO.
3'	96"	5"	5"	S2710-L72
4'	96"	5"	5"	S2711-L96
5'	96"	5"	5"	S2712-L124

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Structural Blocking (by others) is required.

FEATURES

- Opal Matte Acrylic Bottom Lens
- Direct 85% – Indirect 15%
- Solid Aluminum Material
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- Integral Driver
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ OA	+ Option Code
S2710-L72	+ 27K	+ PT	+ OA	+ Option	
S2711-L96	30K	XT			
S2712-L124	35K				
	40K				

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 69 LPW Delivered Lumens (Example: L72= 72W x 69LPW = 4,968 Lumens)