


S2715 Series

Honey Dipper



DIMENSIONS

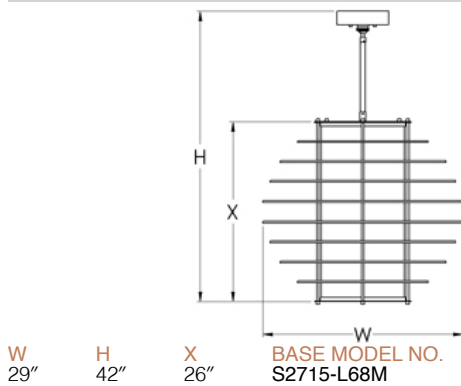

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic
- Solid Metal Rings
- 1/4" Clear Acrylic Disks
- Single Stem
- 45 Degree Swivel Canopy
- Opal Matte Bottom Lens
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + OA + Option Code
S2715-L68M + 27K + PT + OA + Option
30K
35K
40K

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

OA Specify Overall Height of Fixture in Inches; e.g. – OA96

SB3 Clear Silver Braided Cord with (3) Adjustable Aircraft Cables

BK3 Black Cord with (3) Adjustable Aircraft Cables

WH3 White Cord with (3) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~ 72 LPW Delivered Lumens (Example: L68M= 68W x 72LPW = 4,896 Lumens)