



S2740 Series

Tubular Man!

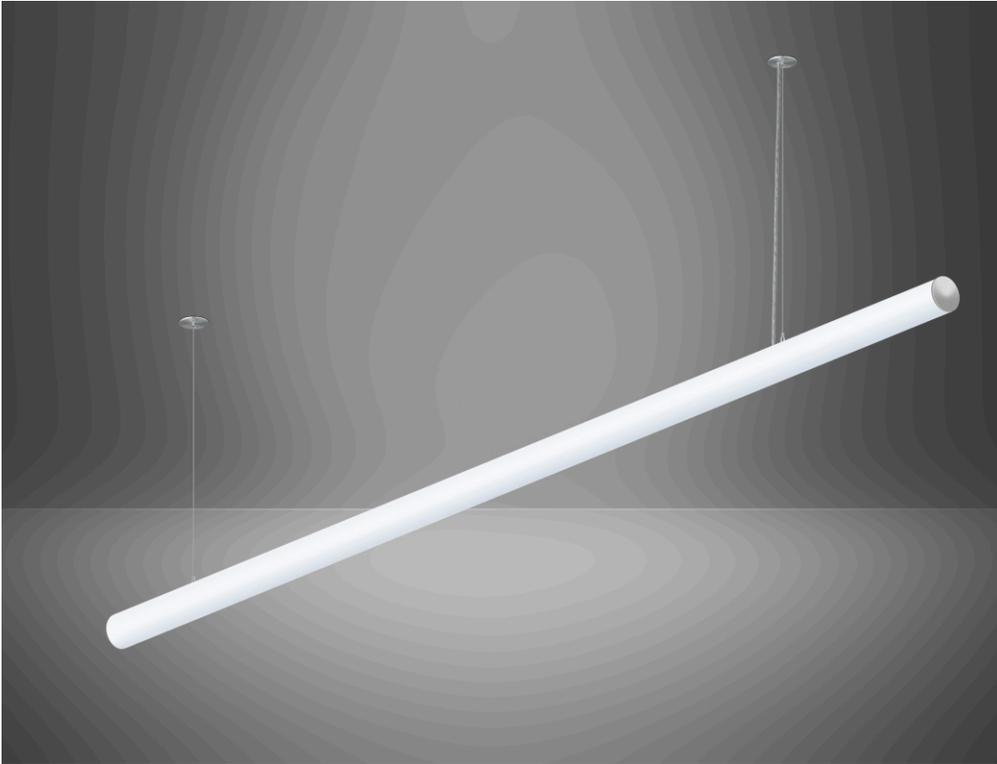

DIMENSIONS:

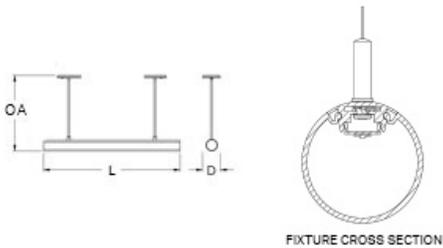

L	D	OA	BASE MODEL NO.
3'	3"	48"	S2740
4'	3"	48"	S2741
5'	3"	48"	S2742
6'	3"	48"	S2743
8'	3"	48"	S2744
10'	3"	48"	S2745

Drawings indicate proportional scaling of nominal lengths:



Nominal Length + 2 End Caps = Actual Length

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ End Cap	+ OA	+ Mounting Code	+ Option Code
S2740-L24	+ 27K	+ PT	+ FEC	+ OA	+ MCR	+ Option	
S2741-L32	30K	XT	VEC		LCI		
S2742-L40	35K	CC	CEC		CCI		
S2743-L48	40K		DEC		PCI†		
S2744-L64			SEC		PCR†		
S2745-L80							

†For Power-Over-Cable options consult factory for limitations.

FINISHES

Extruded Top Rail & Canopies/Driver Enclosures –
Powder Coated White (Standard)
End Caps –

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Emergency Battery Pack for LED Lighting (Remote Only)

LIGHT OUTPUT

LXX = ~ 112 LPW Delivered Lumens (Example: L48= 48W x 112LPW = 5,376 Lumens)


END CAP OPTIONS



BENEFITS AND FEATURES

- Extruded Aluminum Housing w/ Opal Acrylic Lens
- Incremental Lengths to Meet the Needs of Your Project
- 5 End Cap Styles in Milled Aluminum
- 4 New Metal Finishes
- 4 Color Temperature Options
- 80+ CRI LEDS
- 5 Mounting Options
- For Horizontal or Angled Mounting Conditions (See Swivel Mount)
- 0-10V Dimming to 1%
- High Efficiency 120/277V Universal Driver
- >160 LPW Source Lumens
- Serviceable LED Tray

- **Made in the USA**

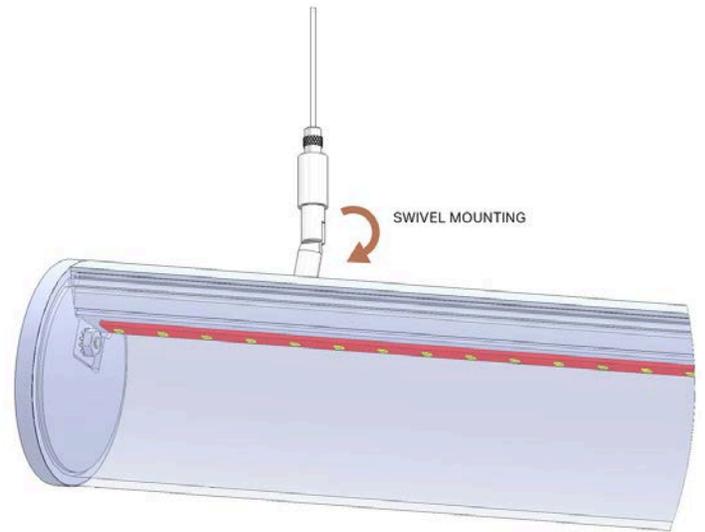

REMOTE DRIVER AND SURFACE DRIVER INFORMATION

- MCR** – Minimal Canopy Option Utilizes Remote Driver In Enclosure
- LCI** – Linear Surface Canopy with Integral Driver for Mounting to a 4" Standard J-Box
- CCI** – Centered Surface Canopy with Integral Driver for Mounting to a 4" Standard J-Box
- PCI** – Linear Surface Canopy Utilizing Power Over Cables with Integral Driver for Mounting to a 4" Standard J-Box (Consult Factory for Details and Limitations)
- PCR** – Power Over Cable with Remote Driver (Consult Factory for Details and Limitations) Fixed OAH, Max 4'-0"

