


DIMENSIONS:



W	D	H	BASE MODEL NO.
3'	2 3/4"	48"	S2770-L24
4'	2 3/4"	48"	S2771-L32
5'	2 3/4"	48"	S2772-L40
6'	2 3/4"	48"	S2773-L48
8'	2 3/4"	48"	S2774-L64
10'	2 3/4"	48"	S2775-L80

Drawings indicate proportional scaling of nominal lengths:

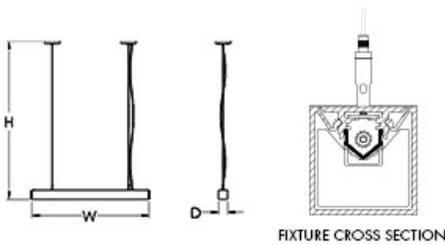

Nominal Length + 2 End Caps = Actual Length

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ End Cap	+ OA	+ Mounting Code	+ Option Code
S2770-L24	+ 27K	+ PT	+ FEC	+ OA	+ MCR	+ Option	
S2771-L32	30K	XT	VEC		LCI		
S2772-L40	35K	CC	SEC		CCI		
S2773-L48	40K				PCI†		
S2774-L64					PCR†		
S2775-L80							

†For Power-Over-Cable options consult factory for limitations.

FINISHES

Extruded Top Rail & Canopies/Driver Enclosures –
 Powder Coated White (Standard)
End Caps –

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
 EML Emergency Battery Pack for LED Lighting (Remote Only)

LIGHT OUTPUT

LXX = ~ 89 LPW Delivered Lumens (Example: L48= 48W x 89LPW = 4,272 Lumens)


END CAP OPTIONS



BENEFITS AND FEATURES

- Extruded Aluminum Housing w/ Opal Acrylic Lens
- Incremental Lengths to Meet the Needs of Your Project
- 5 End Cap Styles in Milled Aluminum
- 4 New Metal Finishes
- 4 Color Temperature Options
- 80+ CRI LEDS
- 5 Mounting Options
- For Horizontal or Angled Mounting Conditions (See Swivel Mount)
- 0-10V Dimming to 1%
- High Efficiency 120/277V Universal Driver
- >160 LPW Source Lumens
- Serviceable LED Tray

• Made in the USA

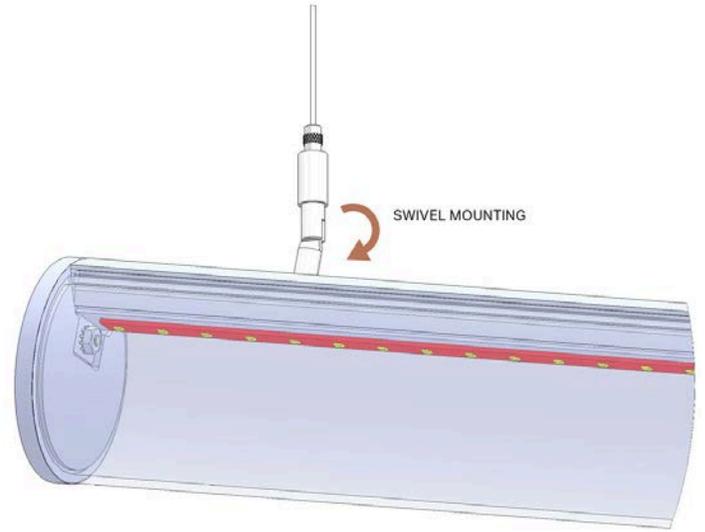

REMOTE DRIVER AND SURFACE DRIVER INFORMATION

- MCR** – Minimal Canopy Option Utilizes Remote Driver In Enclosure
- LCI** – Linear Surface Canopy with Integral Driver for Mounting to a 4" Standard J-Box
- CCI** – Centered Surface Canopy with Integral Driver for Mounting to a 4" Standard J-Box
- PCI** – Linear Surface Canopy Utilizing Power Over Cables with Integral Driver for Mounting to a 4" Standard J-Box (Consult Factory for Details and Limitations)
- PCR** – Power Over Cable with Remote Driver (Consult Factory for Details and Limitations) Fixed OAH, Max 4'-0"

