



S2790-U Series

Mini-Minimo Up

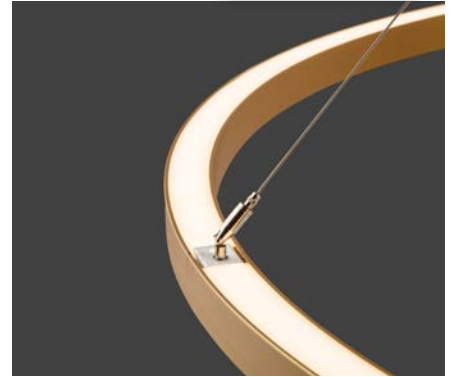

DIMENSIONS

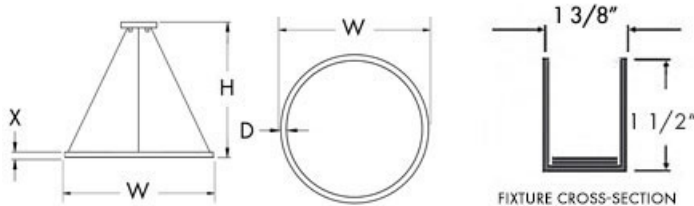

W	X	D	H	BASE MODEL NO.
32"	1 1/2"	1 3/8"	96"	S2790-U-L46†
36"	1 1/2"	1 3/8"	96"	S2791-U-L62†
48"	1 1/2"	1 3/8"	96"	S2792-U-L78†
60"	1 1/2"	1 3/8"	96"	S2793-U-L90†
72"	1 1/2"	1 3/8"	96"	S2794-U-L132†
96"	1 1/2"	1 3/8"	96"	S2795-U-L192*
120"	1 1/2"	1 3/8"	96"	S2796-U-L240*

†Central Canopy (Standard) and MCR Mounting Option Available

*MCR Mounting Only – No Central Canopy

SPECIFICATIONS

Driver: Constant Voltage, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Lensed and no-lensed uplight options
- Solid Aluminum Material
- Central Canopy 8" Dia. (S2790-S2794 Only)
- Driver(s) in Canopy
- Clear Silver Braided Cord with (4) Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+	Lamp Code	+	CCT	+	Finish	+	OA	+	Option Code
S2790-U-L46	+	27K	+	PT	+	OA	+	Option		
S2791-U-L62	+	30K	+	XT	+	OA	+	Option		
S2792-U-L78	+	35K	+	CC	+	OA	+	Option		
S2793-U-L90	+	40K	+		+	OA	+	Option		
S2794-U-L132										
S2795-U-L192										
S2796-U-L240										

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

MCR Multi-Canopy – Remote Driver Option [(S2790-S2794) 4 Vertical Cables and Canopies – (S2795-S2796) 8 Vertical Cables and Canopies]

LIGHT OUTPUT

LXX = ~ 56.4 LPW (With Lens)

~86.7 LPW (Without Lens)

(Example: L46 = 46W x 56.4LPW = 2,594.4 Lumens)

