


# S2860 Series

Corono 5



## DIMENSIONS

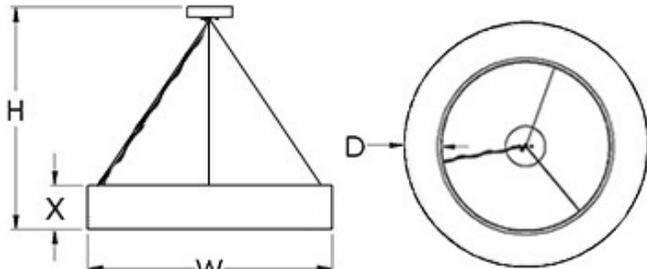

W	H	D	X	BASE MODEL NO.
3'	96"	5"	5"	<b>S2860-L72</b>
4'	96"	5"	5"	<b>S2861-L96</b>
5'	96"	5"	5"	<b>S2862-L124</b>

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

## FEATURES

- Opal Acrylic Lens on (3) Sides (Including Top)
- Solid Aluminum Material
- Canopy Mounted Drivers
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code + OA + Option Code

S2860-L72	+	27K	+	PT	+	OA	+	Option
S2861-L96		30K		XT				
S2862-L124		35K		CC				
		40K						

## FINISHES

PT Powder Coated Finishes\*

XT Trending Brushed Metal Finishes\*

CC Custom Painted Finish

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

**BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.

**EML** Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

## LIGHT OUTPUT

**LXX** = ~ 99 LPW Delivered Lumens (Example: L72= 72W x 99LPW = 7,128 Lumens)