


S2880 Series

Novo 3



DIMENSIONS

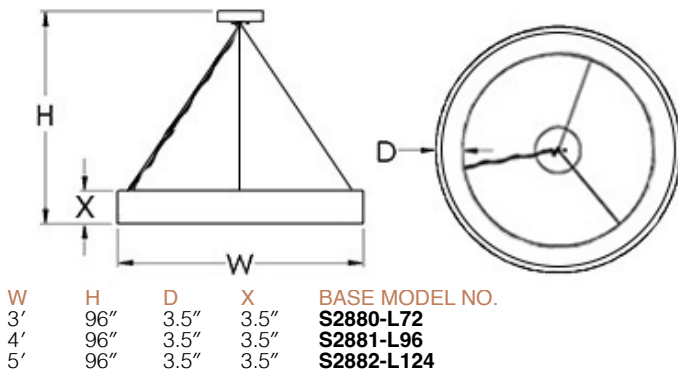

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Acrylic Lens on (3) Sides (Including Top)
- Solid Aluminum Material
- Canopy Mounted Drivers
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code + OA + Option Code

S2880-L72	+	27K	+	PT	+	OA	+	Option
S2881-L96		30K		XT				
S2882-L124		35K		CC				
		40K						

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 99 LPW Delivered Lumens (Example: L72= 72W x 99LPW = 7,128 Lumens)

