


S2890 Series

Novo 5



DIMENSIONS

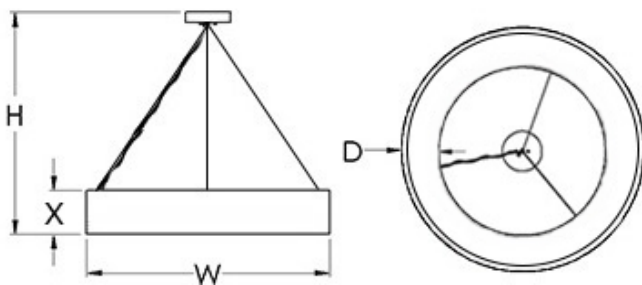

W	H	D	X	BASE MODEL NO.
3'	96"	5"	5"	S2890-L72
4'	96"	5"	5"	S2891-L96
5'	96"	5"	5"	S2892-L124

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Acrylic Lens on (3) Sides (Including Top)
- Solid Aluminum Material
- Canopy Mounted Drivers
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code + OA + Option Code

S2890-L72	+	27K	+	PT	CT	+	OA	+	Option
S2891-L96		30K		CC	ZT				
S2892-L124		35K		BA	PWT				
		40K		NT	BST				
				GT					

FINISHES

BA Brushed Aluminum	PWT Pewter Touch
ZT Bronze Touch	BST Blackened Steel Touch
NT Nickel Touch	CC Custom Painted Finish
GT Gold Touch	PT Powder Coated Finishes*
CT Copper Touch	

*(Specify Color Code from the list of Powder Coating Finishes)

OPTIONS

EML Emergency Battery Pack with LED Lighting (Remote – Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 99 LPW Delivered Lumens (Example: L72= 72 x 99 = 7,128 Lumens)