


S2935 Series

Capa



DIMENSIONS

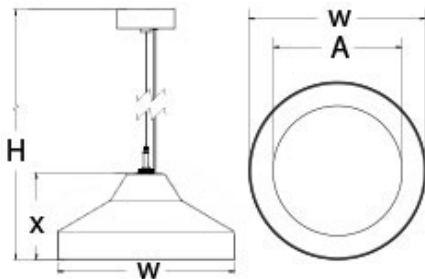

W	H	X	A	BASE MODEL NO.
6 1/2"	48"	3"	4 3/4"	S2935-L12
14"	48"	7"	10 1/4"	S2936-L30
18 1/2"	48"	9"	13 1/2"	S2937-L54

SPECIFICATIONS

Driver: 0-10V Dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic Interior Lens
- Clear Silver Braided Cord with Adjustable Aircraft Cables
- Seamless Aluminum Material
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Exterior Finish + Trim/Canopy Finish + OA + Option Code

S2935-L12	+	27K	+	PT	+	PT	+	OA	+	Option
S2936-L30		30K		XT		XT				
S2937-L54		35K		CC		CC				
		40K								

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

1S Stem Mount

BK1 Black Cord with (1) Adjustable Aircraft Cable

WH1 White Cord with (1) Adjustable Aircraft Cable

LIGHT OUTPUT

LXX = ~ 88 LPW (S2937) Delivered Lumens (Example: L54= 54W x 88LPW = 4,752 Lumens) or ~70 LPW (S2935) Delivered Lumens (Example: L12= 12W x 70LPW = 840 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182

© Copyright 2025 Scott Architectural Lighting. All Rights Reserved. Made in the USA.

