



S2A40 Series

Uccello

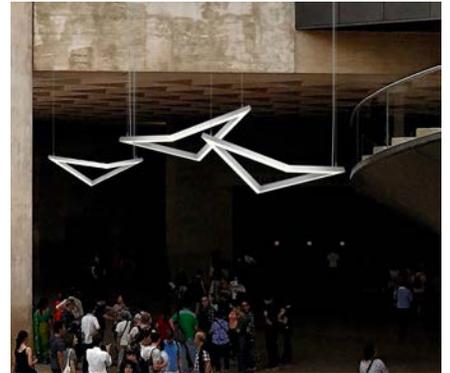

DIMENSIONS

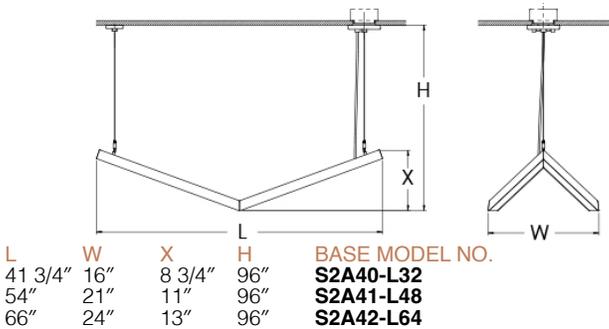

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

FEATURES

- Clear Silver Braided Cord with (2) Adjustable Aircraft Cables
- Continuous illuminated downlight lens
- Mitered and Welded Corners
- Constructed of Extruded Aluminum
- LED 0-10V Dimming Driver (in remote box above ceiling)

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

Model No.	Lamp Code	Finish	OA	Option Code
S2A40-L32	27K	PT		Option
S2A41-L48	30K	XT		
S2A42-L64	35K	CC		
	40K			

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. – OA96

LIGHT OUTPUT

LXX = ~ 92 LPW Delivered Lumens (Example: L24= 24W x 92LPW = 2,994 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182

© Copyright 2025 Scott Architectural Lighting. All Rights Reserved. Made in the USA.

