

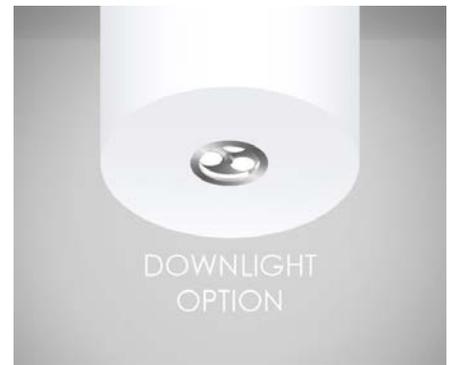


# S2B90 Series

Cyla 12

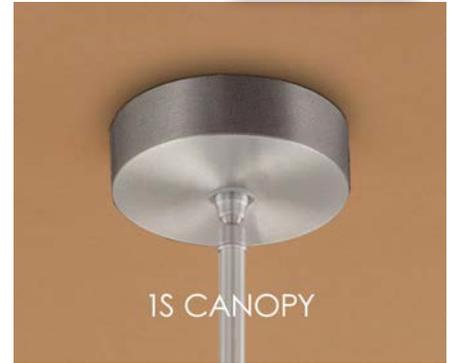

## DIMENSIONS

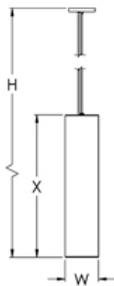

W	H	X	BASE MODEL NO.
12"	96"	48"	<b>S2B93-L48</b>
12"	120"	72"	<b>S2B95-L72</b>
12"	120"	96"	<b>S2B96-L96</b>

## SPECIFICATIONS

**Drivers:** 0-10V dimming to 1%, 120/277 for both Cylinder and Downlight (on separate circuits)

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

## FEATURES

- Opal Matte Acrylic Cylinder
- Clear Silver Braided Cord with (1) Adjustable Aircraft Cable
- Downlight and Cylinder Core May Be Wired to Separate Control Circuits
- Drivers Mounted in Canopy
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Downlight + Lamp Code + Finish + OA + Option Code

Model No.	Downlight	Lamp Code	Finish	OA	Option Code
S2B93-L48	+ _____*	+ 27K	+ PT	+ OA	+ Option
S2B95-L72	D18N	30K	XT		
S2B96-L96	D18M	35K	CC		
	D18W	40K			

\_\_\_\_\_\* = if left blank - no downlight

## FINISHES

PT Powder Coated Finishes\*

XT Trending Brushed Metal Finishes\*

CC Custom Painted Finish

\*(Specify Color Code from the list of Finishes - ie. Gold Touch would be 'GT')

## DOWNLIGHT OPTIONS

- D18N Narrow (30 degrees)
- D18M Medium (45 degrees)
- D18W Wide (60 degrees)

## OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. - OA48

1S Single Stem

BK1 Black Cord with (1) Adjustable Aircraft Cables

WH1 White Cord with (1) Adjustable Aircraft Cables

## LUMENS

**Cylinder Core Lighting Lumens:** LXX = LED Wattage, therefore L24 = LED 24W. The typical lumen output is ~109LPW, so therefore L24 would deliver 2,616L. Use this formula to estimate delivered lumens based on the LXX number for each length.

**Downlight Lumens:** DxxW indicates Downlight wattage and beam spread. For the downlight, typical lumen output is 100LPW, so a D12W would deliver 1,200L in a wide beam pattern.