




DIMENSIONS

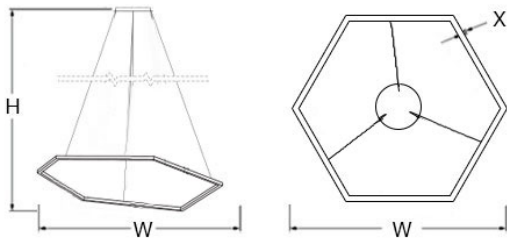

W	X	H	BASE MODEL NO.
32"	1 3/8"	72"	S2C25-L32
49"	1 3/8"	72"	S2C26-L48
60"	1 3/8"	72"	S2C27-L60

SPECIFICATIONS

Driver: 0-10V Dimming to 1%, 120/277 (Drivers are Remote)
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided (Additional structural blocking required for weight).

FEATURES

- Direct Illumination (indirect option)
- LED continuous appearance
- Flexible Silicone Opal Lens
- Clear Silver Braided Cord with (3) Adjustable Aircraft Cables
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ Finish Code	+ OA	+ Option Code
S2C25-L32	+ 27K	+ PT	+ OA	+ Option
S2C26-L48	+ 30K	+ XT		
S2C27-L60	+ 35K	+ CC		
	+ 40K			

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

OA Specify Overall Height of Fixture in Inches; E.G. – OA96

RU Ring Uplight – inverted ring

BK3 Black Cord with (3) Adjustable Aircraft Cables

WH3 White Cord with (3) Adjustable Aircraft Cables

LIGHT OUTPUT

LXX = ~60 LPW Delivered Lumens (Example: L48= 48W x 60LPW = 2,880 Lumens)