


DIMENSIONS

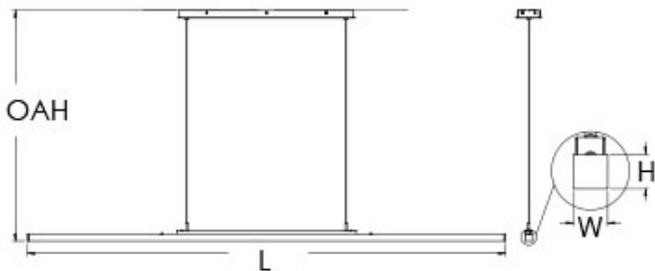

OA	Cable OC Spacing	H	W	L	BASE MODEL NO.
48"	10"	1 3/8"	1 3/8"	24"	S2C70-L16
48"	10"	1 3/8"	1 3/8"	36"	S2C71-L24
48"	10"	1 3/8"	1 3/8"	48"	S2C72-L32
48"	24"	1 3/8"	1 3/8"	60"	S2C73-L40
48"	24"	1 3/8"	1 3/8"	72"	S2C74-L48
48"	24"	1 3/8"	1 3/8"	96"	S2C75-L64

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Silicone Lens
- Power Over Cable Design
- Integral Driver in Canopy
- Aluminum Extrusion
- Powder Coated Black End Caps
- Clean Line Styling
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S2C70-L16	+	27K	+	PT	+	Option
S2C71-L24		30K		XT		
S2C72-L32		35K				
S2C73-L40		40K				
S2C74-L48						
S2C75-L64						

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

OA Specify Overall Height of Fixture in Inches; Is not field adjustable – please confirm OAH; E.G. – OA96

REM – Remote Driver Mounting in box above the ceiling – with minimal mounting canopy.

LIGHT OUTPUT

LXX = ~ 70 LPW Delivered Lumens (Example: L24= 24W x 70 LPW = 1,680 Lumens)