




DIMENSIONS

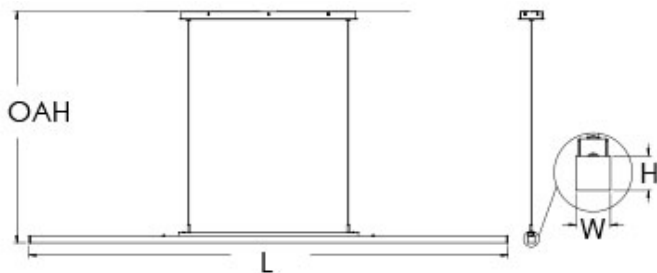

OA	Cable OC Spacing	H	W	L	BASE MODEL NO.
48"	10"	1 3/8"	1 3/8"	24"	S2C70-L16
48"	10"	1 3/8"	1 3/8"	36"	S2C71-L24
48"	10"	1 3/8"	1 3/8"	48"	S2C72-L32
48"	24"	1 3/8"	1 3/8"	60"	S2C73-L40
48"	24"	1 3/8"	1 3/8"	72"	S2C74-L48
48"	24"	1 3/8"	1 3/8"	96"	S2C75-L64

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Silicone Lens
- Power Over Cable Design
- Integral Driver in Canopy
- Aluminum Extrusion
- Powder Coated Black End Caps
- Clean Line Styling
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ Option Code
S2C70-L16	27K	PT	BB	Option
S2C71-L24	30K	NT	BC	
S2C72-L32	35K	GT	BA	
S2C73-L40	40K	CT		
S2C74-L48		ZT		
S2C75-L64		PWT		
		TT		

FINISHES

BB Brushed Brass	CT Copper Touch
BC Brushed Chrome	ZT Bronze Touch
BA Brushed Aluminum	PWT Pewter Touch
NT Nickel Touch	TT Toffee Touch
GT Gold Touch	PT Powder Coated Finishes*

*(Specify Color Code from the list of Powder Coating Finishes)

Note: For special finishes such as different color end caps or canopy, contact the factory.

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

OA Specify Overall Height of Fixture in Inches; Is not field adjustable – please confirm OAH; E.G. – OA96

REM – Remote Driver Mounting in box above the ceiling – with minimal mounting canopy.

LIGHT OUTPUT

LXX = ~ 70 LPW Delivered Lumens (Example: L24= 24W x 70 LPW = 1,680 Lumens)