



S2D75 Series

Bolla Pendant

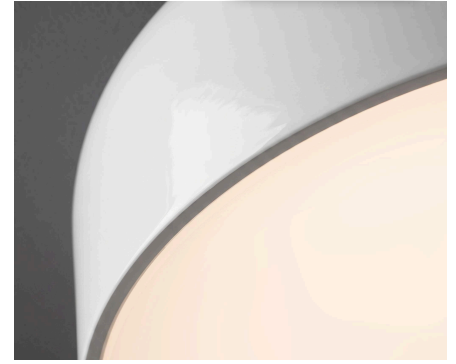

DIMENSIONS

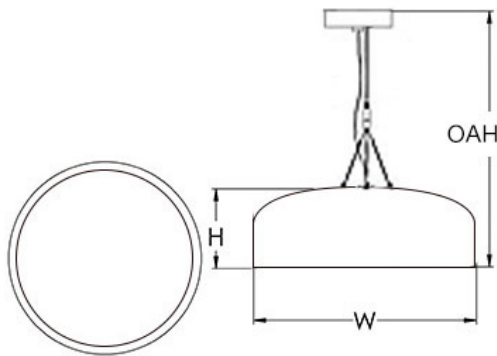

W	H	OAH	BASE MODEL NO.
23 5/8"	8 1/2"	96"	S2D75-L40
23 5/8"	8 1/2"	96"	S2D75-L40A
23 5/8"	8 1/2"	96"	S2D75-3N15 (Lamps by others)

SPECIFICATIONS

Voltage:

L40 – 120/277V, 0-10V 1% Dimming

L40A – 120V Phase Dim – AND 120/277V 0-10V Dimming (Driverless LED)

3N15 – 120V

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Molded Opal Glass Lens
- Spun Metal Housing
- S2D75-L40 Only – 0-10V 1% Dimming
- S2D75-L40A Only – 120V Phase Dimming and 120/277V 0-10V Dimming (Driverless 24W LED)
- S2D75-3N15 Only – (3) E26 Sockets for up to 15W LED Lamps (by others)

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S2D75-L40 + 27K + PI + Option
 S2D75-L40A + 30K
 35K
 40K

S2D75-3N15 + PI + Option

FINISHES

PT Powder Coated Finishes*

*(Specify Color Code from the list of Finishes – ie. White would be 'WH')

OPTIONS

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)