


DIMENSIONS

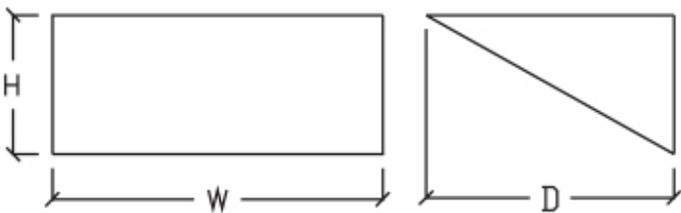

W	H	D	MC	BASE MODEL NO.
12"	5"	9"	2 1/2"	S3030-L24
18"	5"	9"	2 1/2"	S3031-L32

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Fabricated Heavy Gauge Cold Rolled Steel
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S3030-L24	+	27K	+	PT	+	Option
S3031-L32		30K				
		35K				
		40K				

FINISHES

PT Powder Coated Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

CTG Cleared Tempered Glass Lens

LIGHT OUTPUT

LXX = ~ 115 LPW Delivered Lumens (Example: L24= 24W x 115LPW = 2,760 Lumens)