




DIMENSIONS

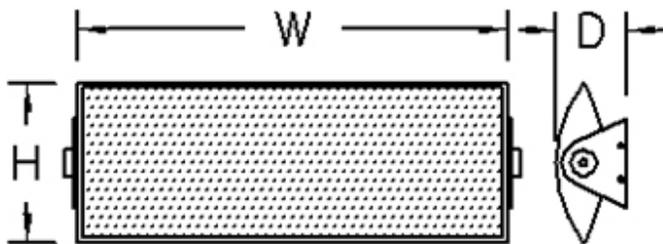

W	H	D	MC	BASE MODEL NO.
19"	9"	4"	4 1/2"	S3290-L18
25 1/4"	9"	4"	4 1/2"	S3291-L24
38"	9"	4"	4 1/2"	S3292-L32

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Perforated Metal Diffuser with Opal Matte Acrylic Lens
- Polished Chrome End-Plates Standard Custom Metal Finishes Available – (Consult Factory)
- ADA Compliant
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S3290-L18	+	27K	+	PT	+	Option
S3291-L24		30K		XT		
S3292-L32		35K		PF		
		40K		CC		

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 69 LPW Delivered Lumens (Example: L18= 18W x 69LPW = 1,242 Lumens)