




DIMENSIONS

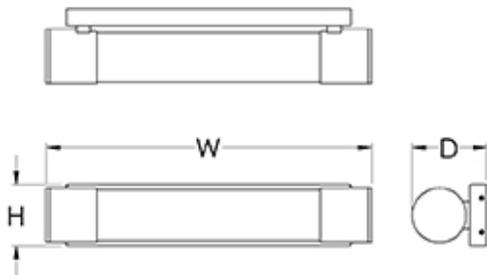

W	H	D	MC	BASE MODEL NO.
24"	4 1/2"	5 1/2"	12"	S3515-L16
36"	4 1/2"	5 1/2"	18"	S3516-L24
48"	4 1/2"	5 1/2"	24"	S3517-L32

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic
- Solid Aluminum End Caps
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+	Lamp Code	+	CCT	+	Finish	+	Option Code
S3515-L16	+	27K	+	PT	+	Option		
S3516-L24		30K		XT				
S3517-L32		35K		PF				
		40K						

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 69 LPW Delivered Lumens (Example: L16= 16W x 69LPW = 1,104 Lumens)