




DIMENSIONS

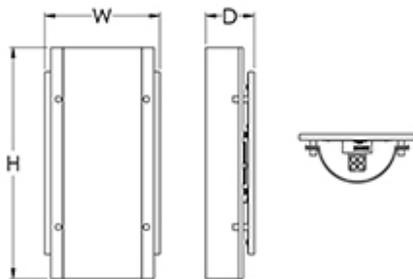

| W | H | D | MC | BASE MODEL NO. |
|--------|-----|----|--------|------------------|
| 9 1/2" | 19" | 4" | 8 1/2" | S3550-L24 |
| 9 1/2" | 19" | 4" | 8 1/2" | S3555-L24 |

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic
- Perforated Brushed Aluminum Metal Diffuser with Mylar Backing (Standard S3555)
- ADA Compliant
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

| Model No. + Lamp Code | + CCT | + Finish | + Option Code |
|-----------------------|-------|----------|---------------|
| S3550-L24 | + 27K | + PT | + Option |
| S3555-L24 | + 30K | + XT | |
| | + 35K | + PF | |
| | + 40K | | |

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

BTL Bottom Lens

TPL Top Lens

FAA Faux Alabaster Acrylic (Hand Painted) [FA1 White; FA2 Antique; FA3 Grey; FA4 Taupe; FA5 Honey; FA6 Tuscan]

LIGHT OUTPUT

LXX = ~ 75 LPW Delivered Lumens (Example: L24= 24W x 75LPW = 1,800 Lumens)