


DIMENSIONS

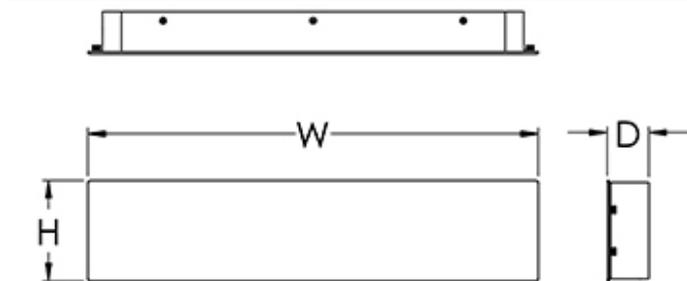

W	H	D	MC	BASE MODEL NO.
28"	6"	3"	14"	S3805-L16
38"	6"	3"	19"	S3806-L24
50"	6"	3"	25"	S3807-L32

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic Panels (2)
- Solid Aluminum Front
- ADA Compliant
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S3805-L16	+	27K	+	PT	+	Option
S3806-L24		30K		XT		
S3807-L32		35K				
		40K				

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 60 LPW Delivered Lumens (Example: L16= 16W x 60LPW = 960 Lumens)