S3975 Series
BROSA

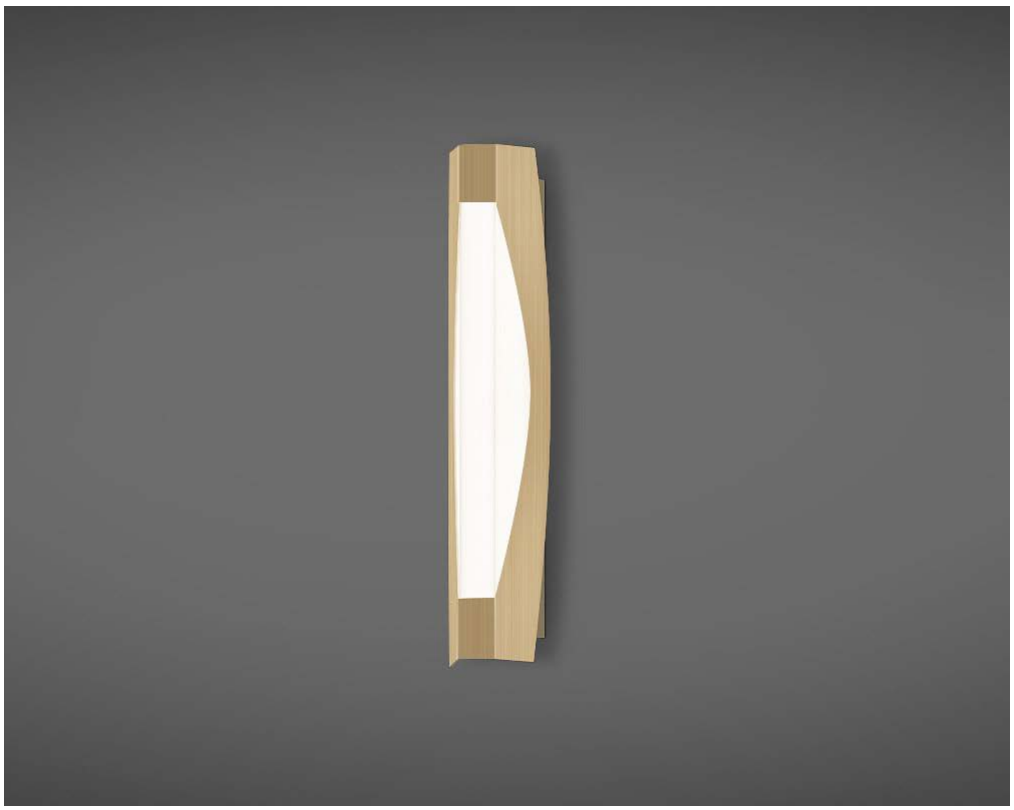

DIMENSIONS

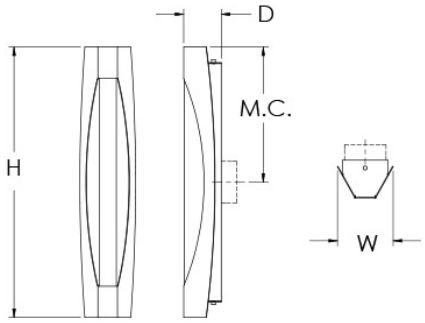

W	H	D	MC	BASE MODEL NO.
5 3/8″	26″	3 3/4″	13″	**S3975-L24**
6 1/8″	38″	3 3/4″	19″	**S3976-L40**

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Aluminum Housing
- Opal Matte Acrylic Diffuser
- ADA Compliant
- Made in USA
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S3975-L24 S3976-L40	+	27K 30K 35K 40K	+	PT BA GT NT ZT CT TT PWT BST	+	Option

FINISHES

BA Brushed Aluminum
NT Nickel Touch
GT Gold Touch
CT Copper Touch
ZT Bronze Touch
TT Bronze Touch
PWT Pewter Touch
BST Blackened Steel Touch
PT Powder Coated Finishes
(Specify Color Code from the list of Powder Coating Finishes)

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 65 LPW Delivered Lumens (Example: L24= 24W x 65LPW = 1,560 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2024 Scott Architectural Lighting. All Rights Reserved. Made in the USA.