


S3A75 Series

Square Man! Sconce



DIMENSIONS

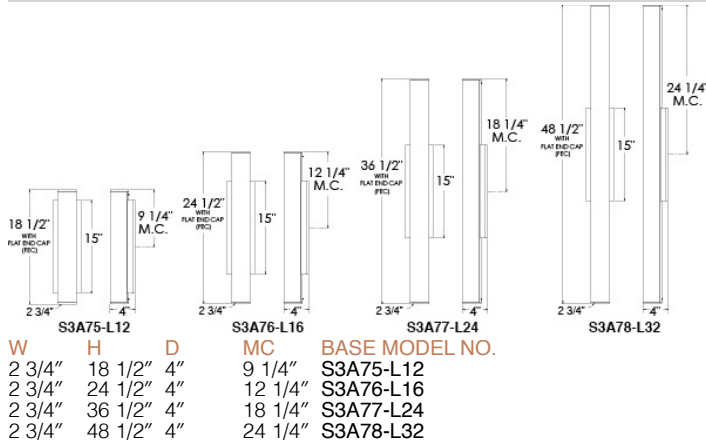

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Extruded Opal Lens
- Vertical or Horizontal Mounting
- Aluminum Body Parts
- ADA Compliant
- Listed for damp location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + End Cap + Option Code

S3A75-L12	+	27K	+	PT	+	FEC	+	Option
S3A76-L16		30K		XT		VEC		
S3A77-L24		35K				SEC		
S3A78-L32		40K				DEC		


FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

END CAP OPTIONS

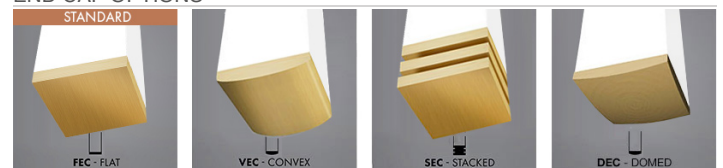

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 89 LPW Delivered Lumens (Example: L12= 12W x 89LPW = 1,068 Lumens)