


DIMENSIONS

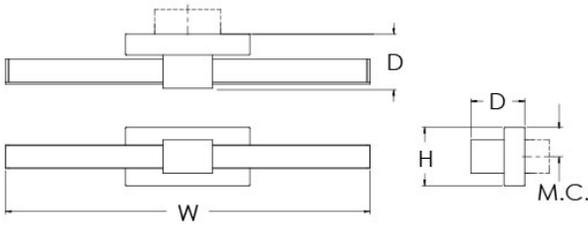

W	MC	H	D	BASE MODEL NO.
22"	1 3/8"	3 3/8"	3 3/4"	S3A85-L16
34"	1 3/8"	3 3/8"	3 3/4"	S3A86-L24
46"	1 3/8"	3 3/8"	3 3/4"	S3A87-L32

SPECIFICATIONS

Driver: 0-10V Dimming to 1%, 120/277

Mounting: Mounts to 2" x 4" Junction Boxes (by others) With Hardware Provided.

FEATURES

- Integral Driver
- ADA Compliant
- Horizontal or Vertical Mounting
- UL Listed for Damp Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish Code

S3A85-L16	+	27K	+	PT
S3A86-L24		30K		XT
S3A87-L32		35K		
		40K		

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 92 LPW Delivered Lumens (Example: L16= 16W x 92LPW = 1,472 Lumens)