




## DIMENSIONS

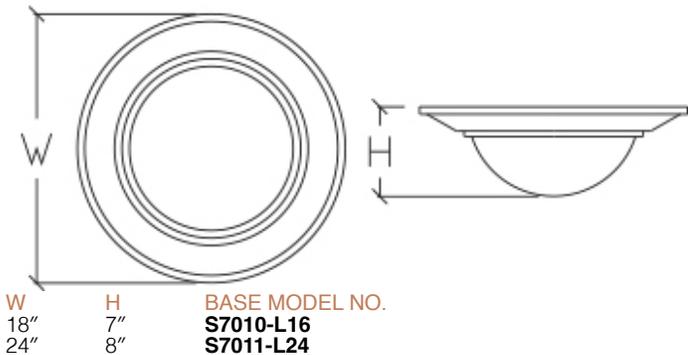

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

## FEATURES

- Opal Matte Acrylic Bowl
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

|           |   |     |   |    |   |        |
|-----------|---|-----|---|----|---|--------|
| S7010-L16 | + | 27K | + | PT | + | Option |
| S7011-L24 |   | 30K |   | XT |   |        |
|           |   | 35K |   | PF |   |        |
|           |   | 40K |   |    |   |        |

## FINISHES

PT Powder Coated Finishes\*

XT Trending Brushed Metal Finishes\*

PF Pure Metal Finishes\*

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

**BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.

**EML** Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

**FAA** Faux Alabaster Acrylic (Hand Painted) [FA1 White; FA2 Antique; FA3 Grey; FA4 Taupe; FA5 Honey; FA6 Tuscan]

## LIGHT OUTPUT

**LXX** = ~ 63 LPW Delivered Lumens (Example: L16= 16W x 63LPW = 1,008 Lumens)