S7020 Series

DIMENSIONS

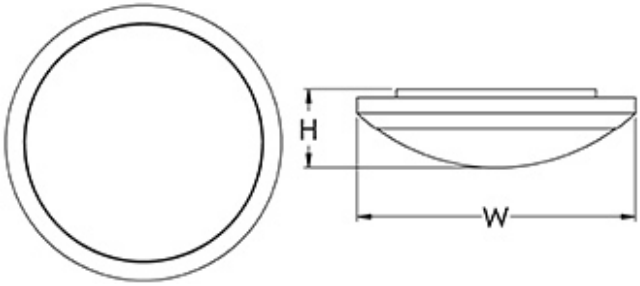

W	H	BASE MODEL NO.
18″	5″	**S7020-L16**
24″	6″	**S7021-L24**

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic Bowl
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S7020-L16	+	27K	+	PT	+	Option
S7021-L24		30K		BB		
		35K		BC		
		40K		PB		
				PC		

FINISHES

BB Brushed Brass
BC Brushed Chrome
PB Polished Brass
PC Polished Chrome
PT Powder Coated Finishes*
*(Specify Color Code from the list of Powder Coating Finishes)

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)
OMA Opal Matt Acrylic Bowl
FAA Faux Alabaster Acrylic (Hand Painted) [FA1 White; FA2 Antique; FA3 Grey; FA4 Taupe; FA5 Honey; FA6 Tuscan]

LIGHT OUTPUT

LXX = ~ 63 LPW Delivered Lumens (Example: L16= 16W x 63LPW = 1,008 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2024 Scott Architectural Lighting. All Rights Reserved. Made in the USA.