




DIMENSIONS

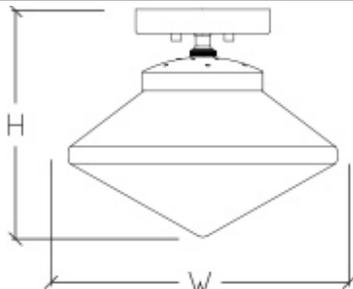

W	H	BASE MODEL NO.
10"	7 1/2"	S7080-L12
14"	11"	S7081-L12
18"	15"	S7082-L24

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Glass Diffuser
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+	Lamp Code	+	CCT	+	Finish	+	Option Code
S7080-L12	+	27K	+	PT	+	Option		
S7081-L12		30K		XT				
S7082-L24		35K		PF				
		40K		CC				

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

PF Pure Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 75 LPW Delivered Lumens (Example: L12= 12W x 75LPW = 900 Lumens)