


S7790 Series

Mini-Minimo Surface



DIMENSIONS

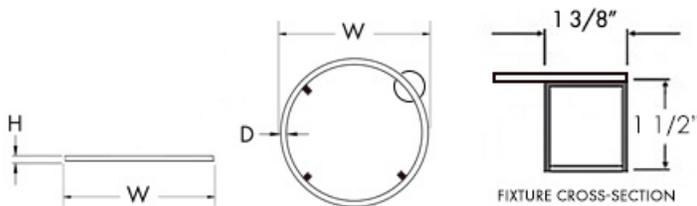

W	H	D	BASE MODEL NO.
32"	1 1/2"	1 3/8"	S7790-L46
36"	1 1/2"	1 3/8"	S7791-L62
48"	1 1/2"	1 3/8"	S7792-L78
60"	1 1/2"	1 3/8"	S7793-L90
72"	1 1/2"	1 3/8"	S7794-L132
96"	1 1/2"	1 3/8"	S7795-L192
120"	1 1/2"	1 3/8"	S7796-L240

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277 (Constant Voltage)
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Mounting consists of (1) full size canopy and 3 mounting clips at 90 degrees.

FEATURES

- Opal Matte Flexible Silicone Bottom Lens
- Solid Aluminum Material
- Remote Driver(s) in a driver enclosure is included
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code					
S7790-L46	+	27K	+	PT	+ Option
S7791-L62		30K		XT	
S7792-L78		35K		CC	
S7793-L90		40K			
S7794-L132					

FINISHES

- PT Powder Coated Finishes*
- XT Trending Brushed Metal Finishes*
- CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 49.4 LPW Delivered Lumens (Example: L46= 46W x 49.4LPW = 2,272 Lumens)