




DIMENSIONS

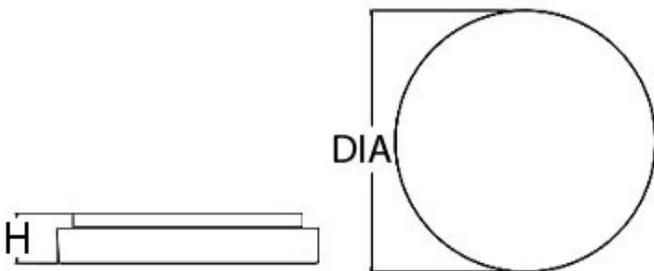

H	Dia	BASE MODEL NO.
5 3/8"	24"	S7800-L48
5 3/8"	24"	S7800-L60
5 3/8"	30"	S7801-L60
5 3/8"	30"	S7801-L72
5 3/8"	36"	S7802-L96
5 3/8"	36"	S7802-L120

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided.

FEATURES

- Opal Matte Acrylic Lens
- Integral Drivers
- Solid Aluminum Material
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+ Lamp Code	+ CCT	+ Finish	+ Option Code
S7800-L48		27K	PT	Option
S7800-L60		30K	XT	
S7801-L60		35K	CC	
S7801-L72		40K		
S7802-L96				
S7802-L120				

FINISHES

PT Powder Coated Finishes*
XT Trending Brushed Metal Finishes*
CC Custom Painted Finish
 *(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)
DPL Deep Lens 8"H Overall Depth = 9 3/4"

LIGHT OUTPUT

LXX = ~ 83 LPW Delivered Lumens (Example: L60= 60W x 83LPW = 4,980 Lumens)