




DIMENSIONS

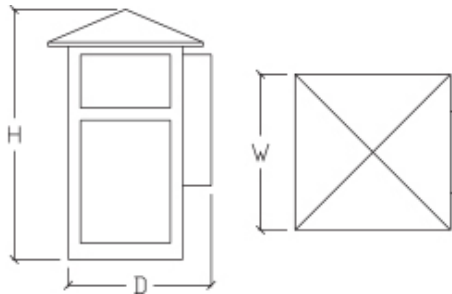

W	H	D	MC	BASE MODEL NO.
9 1/2"	15 1/4"	10"	8"	S9015-L24

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Opal Acrylic Panels Standard
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9015-L24	+	27K	+	PT	+	Option
		30K		AB		
		35K		AP		
		40K		TC		
				VG		

FINISHES

BA Brushed Aluminum

PC Polished Chrome

NT Nickel Touch

GT Gold Touch

CT Copper Touch

CC Custom Painted Finish

PT Powder Coated Finishes*

**

*(Specify Color Code from the list of Powder Coating Finishes [except interior only metallics])

OPTIONS

EML Emergency Battery Pack with LED Lighting (Remote)

SG Seedy Glass

WOG Opal Glass

LIGHT OUTPUT

LXX = ~ 74 LPW Delivered Lumens (Example: L24 = 24 x 74 = 1,776 Lumens)

** Try our new **Shimmer Metallic Paints**, Formulated for Exterior Conditions.