




DIMENSIONS

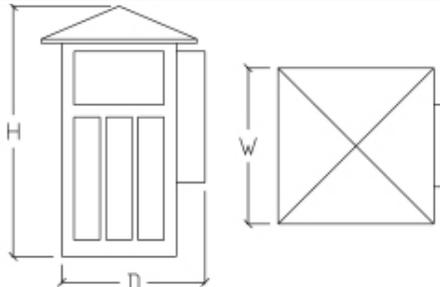

W H D MC BASE MODEL NO.

9 1/2" 15 1/4" 10" 8" **S9020-L24**

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Opal Acrylic Panels Standard
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9020-L24 + 27K + 30K + 35K + 40K + PT / SD / XT + Option

FINISHES

PT Powder Coated Finishes*

SD Shimmer Dimensional Metallic Finishes*

XT Trending Brushed Metal Finishes*

*(Specify Color Code from the list of Finishes [except interior only metallics] – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

SG Seedy Glass

WOG Opal Glass

LIGHT OUTPUT

LXX = ~ 72 LPW Delivered Lumens (Example: L24= 24W x 72LPW = 1,728 Lumens)