S9050 Series

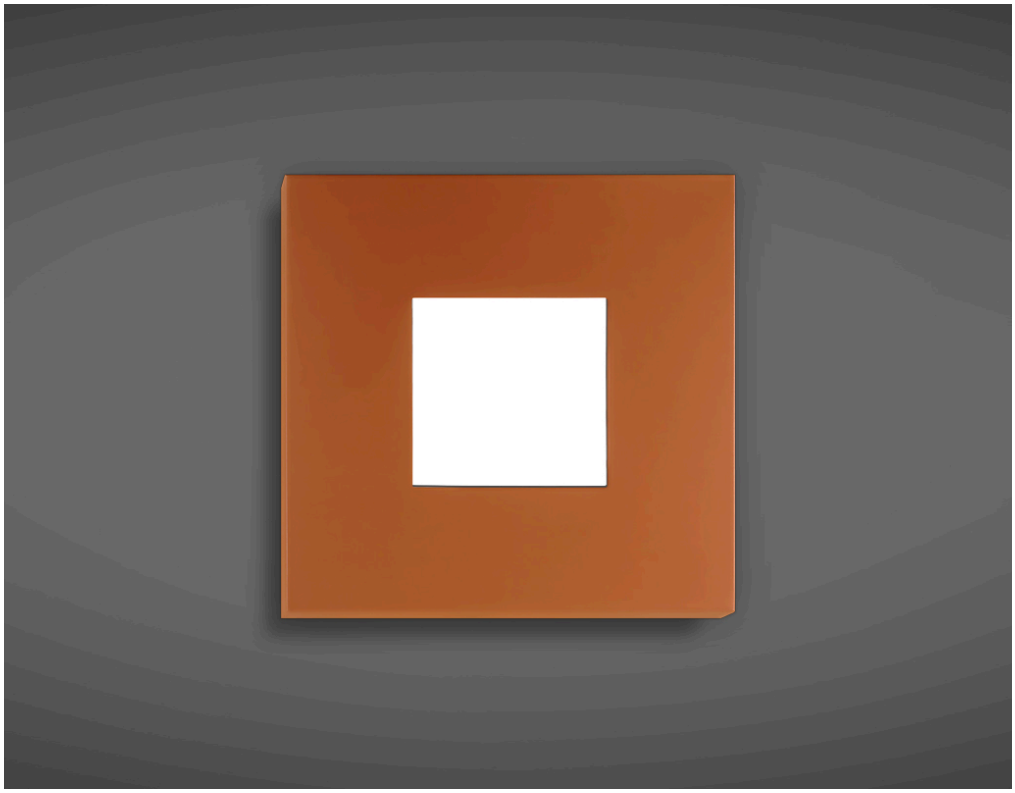

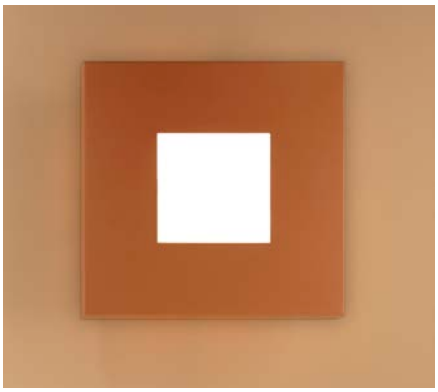

DIMENSIONS

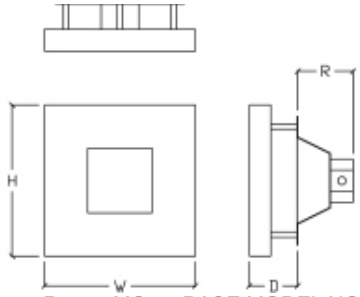

W	H	D	R	MC	BASE MODEL NO.
14″	14″	4 1/2″	5 5/8″	7″	**S9050-L36**

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Semi-Recessed Lamp Housing
- Luminous Polycarbonate Lens
- Custom Face Patterns Available -(Consult Factory)
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9050-L36	+	27K 30K 35K 40K	+	PT SD	+	Option

FINISHES

PT Powder Coated Finishes*
SD Shimmer Dimensional Metallic Finishes*
*(Specify Color Code from the list of Finishes [except interior only metallics] – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup
SM Surface Mount Housing (Integral Ballast)

LIGHT OUTPUT

LXX = ~ 50 LPW Delivered Lumens (Example: L36= 36W x 50LPW = 1,800 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2025 Scott Architectural Lighting. All Rights Reserved. Made in the USA.