S9305 Series

DIMENSIONS

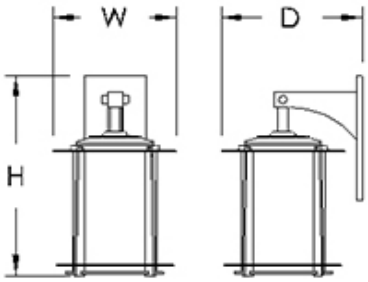

W	H	D	MC	BASE MODEL NO.
10 1/2″	17″	12″	5 1/2″	S9305-L12

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Opal Acrylic Lens
- Solid Aluminum Material
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9305-L12	+	27K 30K 35K 40K	+	PT SD XT	+	Option

FINISHES

PT Powder Coated Finishes*
SD Shimmer Dimensional Metallic Finishes*
XT Trending Brushed Metal Finishes*
*(Specify Color Code from the list of Finishes [except interior only metallics] – ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.
EML Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 58.6 LPW Delivered Lumens (Example: L12= 12W x 58.6LPW = 703.2 Lumens)

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182
© Copyright 2026 Scott Architectural Lighting. All Rights Reserved. Made in the USA.