



S9380 Series

Slant

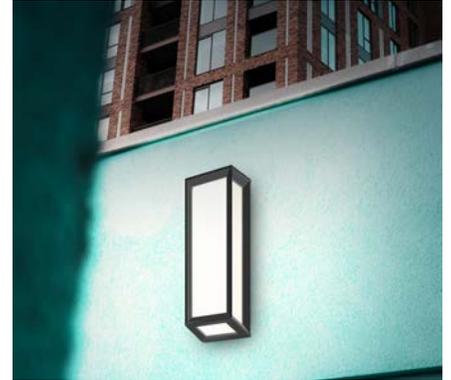

DIMENSIONS



W	H	D	MC	BASE MODEL NO.
6"	18"	7"	9"	S9380-L24
6"	24"	7"	12"	S9381-L32

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Opal Acrylic Lens
- Bar Stock Trim
- Die-Cast End Caps
- UL Listed for Wet Locations
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9380-L24	+	27K	+	PT	+	Option
S9381-L32		30K		SD		
		35K		XT		
		40K		CC		

FINISHES

PT Powder Coated Finishes*

SD Shimmer Dimensional Metallic Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes [except interior only metallics] - ie. Gold Touch would be 'GT')

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

LIGHT OUTPUT

LXX = ~ 83.4 LPW Delivered Lumens (Example: L24= 24W x 83.4LPW = 2,001.6 Lumens)