


DIMENSIONS

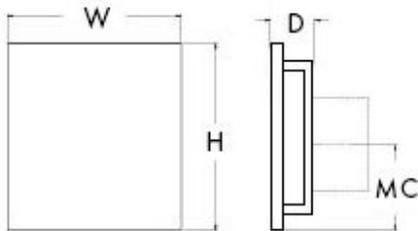

FRONTVIEW		SIDE VIEW		BASE MODEL NO.
H	W	D	MC	
16"	16"	4"	8"	S9450-L32 (4-Directional Light)
16"	16"	4"	8"	S9451-L08 (Downlight Only)

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others)

FEATURES

- Opal Acrylic Lens
- Solid Aluminum Material
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No.	+	Lamp Code	+	CCT	+	Finish	+	Option Code
S9450-L32	+	27K	+	PT	+	Option		
S9451-L08		30K		SD				
		35K		PF				
		40K		XT				
				CC				

FINISHES

- PT** Powder Coated Finishes*
- SD** Shimmer Dimensional Metallic Finishes*
- PF** Pure Metal Finishes*
- XT** Trending Brushed Metal Finishes*
- CC** Custom Painted Finish

*(Specify Color Code from the list of Finishes [except interior only metallics] – ie. Gold Touch would be 'GT')

OPTIONS

- BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.
- EML** Remote 10W Emergency LED Battery Backup

LIGHT OUTPUT

LXX = ~ 75 LPW Delivered Lumens (Example: L32= 32W x 75 LPW = 2,400 Lumens)