


## DIMENSIONS

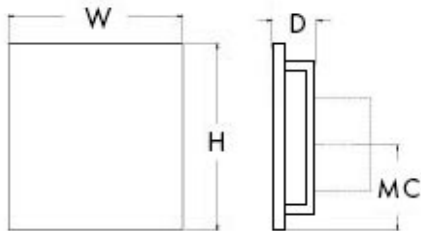

FRONTVIEW				SIDE VIEW	BASE MODEL NO.
H	W	D	MC		
16"	16"	4"	8"		<b>S9450-L32</b> (4-Directional Light)
16"	16"	4"	8"		<b>S9451-L08</b> (Downlight Only)

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others)

## FEATURES

- Opal Matte Acrylic Lens
- Solid Aluminum Material
- UL Listed for Wet Location
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S9450-L32	+	27K	+	PT	+	Option
S9451-L08		30K		CC		
		35K		BA		
		40K		NT		
				GT		
				CT		
				ZT		

## FINISHES

<b>BA</b> Brushed Aluminum	<b>CT</b> Copper Touch
<b>PC</b> Polished Chrome	<b>ZT</b> Bronze Touch
<b>NT</b> Nickel Touch	<b>CC</b> Custom Painted Finish
<b>GT</b> Gold Touch	<b>PT</b> Powder Coated Finishes*
	**

\*(Specify Color Code from the list of Powder Coating Finishes)

## OPTIONS

**BAC** Buy America; Buy American Act; and Build America, Buy America Act Compliant.

**EML** Remote 10W Emergency LED Battery Backup

\*\* Try our new **Shimmer Metallic Paints**, Formulated for Exterior Conditions.

## LIGHT OUTPUT

**LXX** = ~ 75 LPW Delivered Lumens (Example: L32= 32W x 75 LPW = 2,400 Lumens)