


S9465i Series

Clar Exterior



DIMENSIONS

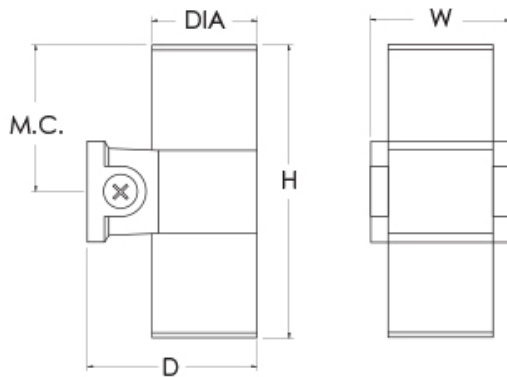

Dia	W	H	D	MC	BASE MODEL NO.
3"	4 1/4"	9"	5 1/4"	4 1/2"	S9465i-L10
4"	4 1/4"	11"	6 5/8"	5 1/2"	S9466i-L20
5 3/4"	5 3/4"	13"	8 3/8"	6 1/2"	S9467i-L35

SPECIFICATIONS

Driver: 0-10V Dimming, 120/277V (Consult factory for 347V)
Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (By Others).

FEATURES

- Fixtures will be shipped with specified settings and beam spreads
- For any variation from standard, please contact factory
- See special features on page 2

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Beam Spread + CCT + Finish + Option Code

S9465i-L10	+	V	+	30K	+	BL	+	Option
S9466i-L20		N		35K		BZ		
S9467i-L35		M		35K				
		W						

FINISHES

BL Matte Black
 BZ Bronze

BEAM SPREAD OPTIONS

V Very Narrow (15 degrees)
 N Narrow (25 degrees)
 M Medium (40 degrees)
 W Wide (60 degrees)


LIGHT OUTPUT

L10 = ~ 95 LPW Nominal Delivered Up and Down
 (Example: L10= 10 x 95 = 950 Lumens)

L20 = ~ 95 LPW Nominal Delivered Up and Down
 (Example: L20= 20 x 95 = 1,900 Lumens)

L35 = ~ 80 LPW Nominal Delivered Up and Down
 (Example: L35= 35 x 80 = 2,800 Lumens)

SPECIAL FEATURES (these features come on all models)



3 Color Temperatures

On board switch allows for on-site adjustment to 3000/3500K/4000K options.



Note: For factory Pre-set, please indicate the CCT in the part number (ex: S9465i-L10-**35K**-BL)

3 Light Levels

On Board Switch allows for on-site adjustment to 3 light levels.

10W/8W/6W
20W/16W/12W
35W/29W/22W

Note: For Factory Pre-Set Watts, please indicate the Wattage in the part number (ex: S9465i-**L06**-30K-BZ)



Photosensor

On Board Sensor and Switch allows an internal photocell to be turned on or off as needed.

NOTE: For Factory Pre-Set to ON, please indicate in the part number (ex: S9465i-L10-40K-BL-**PS**)

Up/Down

On Board Switch allows for on-site setting of Combined up and downlight, Uplight Only or Downlight Only options.

Up/Down – (Blank – standard)
Uplight Only – (UO)
Downlight Only – (DO)

NOTE: For Factory Pre-Set, please indicate the position in the part number (ex: S9465i-L10-40K-BL-PS-**UO**)



Interchangeable Reflectors

Interchangeable reflectors for direct and indirect sources.



(V) Very Narrow 15° Beam (N) Narrow 25° Beam (M) Medium 40° Beam (W) Wide 60° Beam

NOTE: Please indicate the Beam angle in the part number (ex: S9465i-L10**M**-40K-BL-PS)